
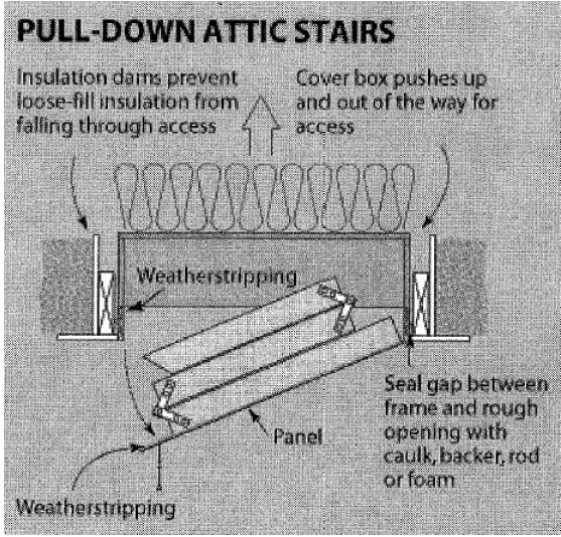


City of Fayetteville Building Safety Division

POLICY & PROCEDURE

Attic Access Opening Insulation

Attic access openings must be sealed and insulated when located in conditioned space. Scuttle holes must have an air seal gasket and be insulated to the same R value of the attic and pull down stairs must have a cover box that insulates the opening. These covers are available commercially. Both methods require a method to hold back the blown in insulation from the opening.

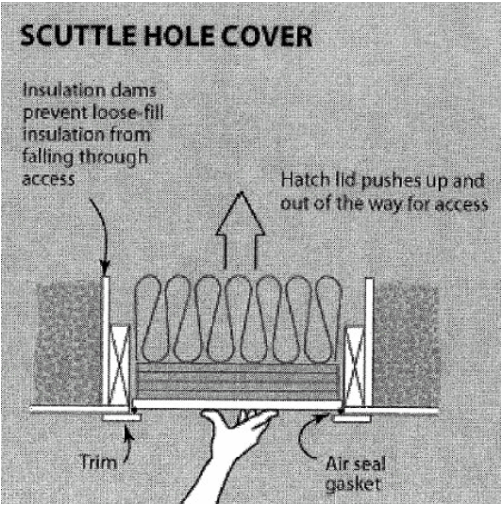

Approved By

Building Official