

POLICY & PROCEDURE
INSPECTION FRAMING
CITY OF FAYETTEVILLE
INSPECTION DIVISION
12-8-97

With reference to 1991 SBC, sections 1708.1 thru 1708.1.9, and 1992 CABO, section R-702.2, and local custom rafter ties (collar beams) shall be required and spacing shall not exceed 4 feet.

Rafters with purlin supports shall have the purlin supported by a notched brace to a load-bearing partition as shown in CABO Figure R-702.3.

PPRAFTIE 12-8-97

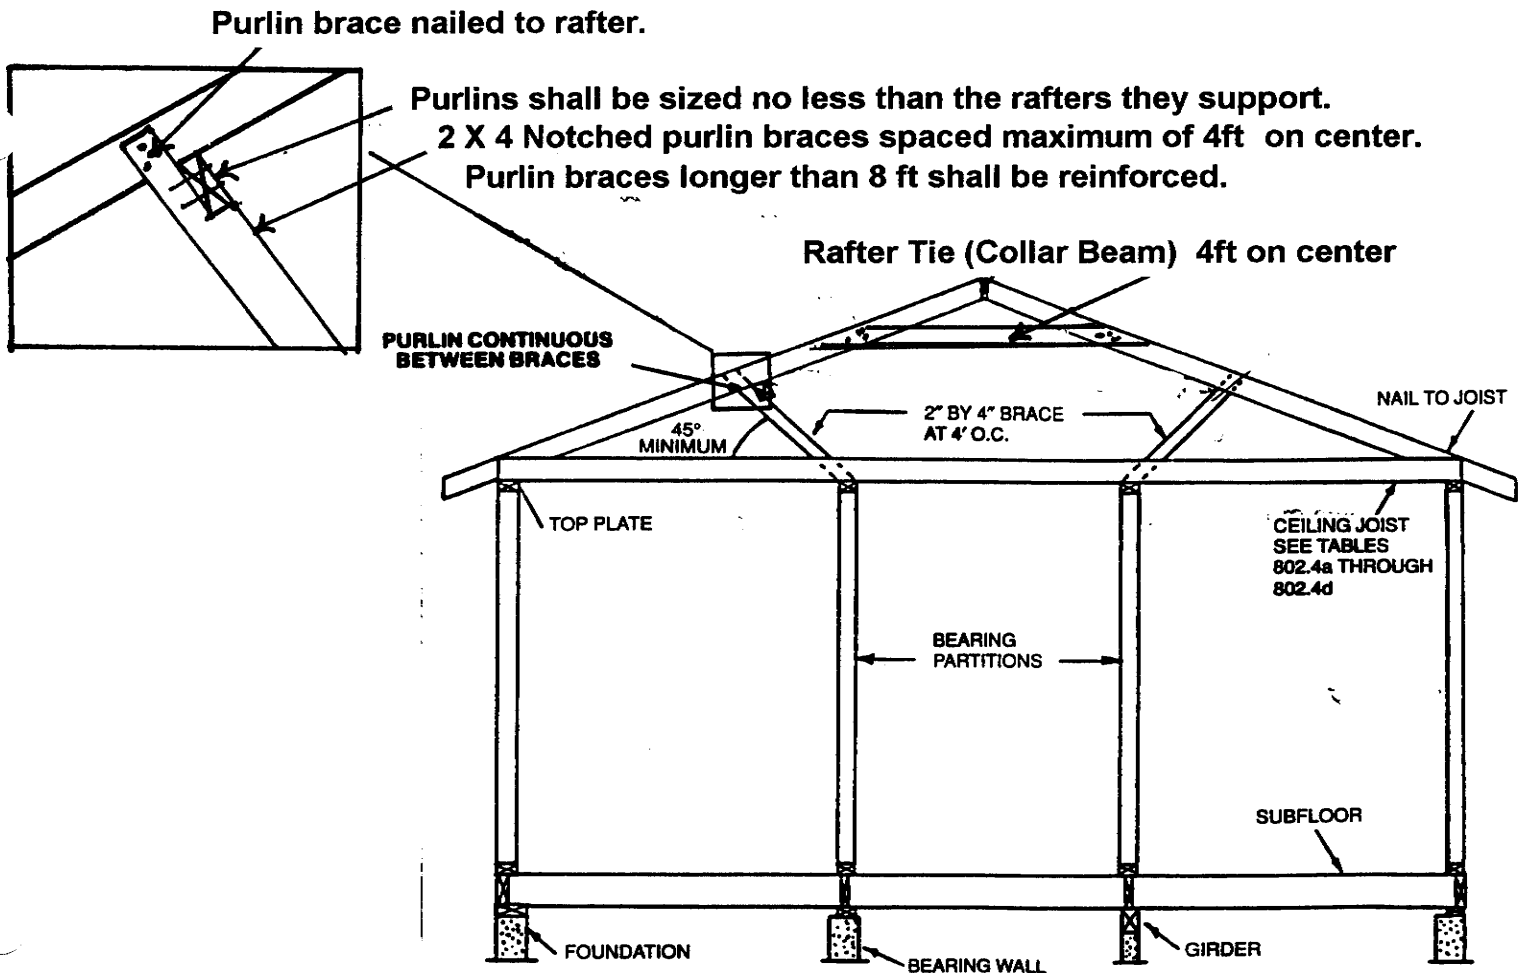


Figure 702.3